



MASTER TL5 High Output



MASTER TL5 HO 54W/865 1SL/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General information		Luminous Efficacy (@ Max Lumen, Rated) (Nom)	
Cap base	G5 [G5]	86 lm/W	
Life to 50% failures preheat (nom.)	30000 h	Chromaticity coordinate X (nom.)	0.313
Features	na [Not Applicable]	Chromaticity coordinate Y (nom.)	0.337
System description	High Output (HO)	Correlated Colour Temperature (Nom)	6500 K
LSF preheat 2,000 hours rated	99 %	Luminous efficacy (rated) (nom.)	78 lm/W
LSF preheat 4,000 hours rated	99 %	Color rendering index (max.)	85
LSF preheat 6,000 hours rated	99 %	Colour-rendering index (min.)	80
LSF preheat 8,000 hours rated	99 %	Colour rendering index (nom.)	82
LSF preheat 16,000 hours rated	97 %	LLMF 2000 h Rated	96 %
LSF preheat 20,000 hours rated	84 %	LLMF 4000 h Rated	95 %
	Sphere	LLMF 6000 h Rated	94 %
		LLMF 8000 h Rated	93 %
		LLMF 12000 h Rated	92 %
		LLMF 16000 h Rated	91 %
		LLMF 20000 h Rated	90 %
Light technical		Operating and electrical	
Colour Code	865 [CCT of 6,500 K]	Power (Rated) (Nom)	54.4 W
Luminous flux (nom.)	4200 lm		
Luminous flux (rated) (nom.)	4200 lm		
Colour designation	Cool Daylight		

MASTER TL5 High Output

Lamp current (nom.)	0.455 A
Temperature	
Design temperature (nom.)	35 °C
Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Cap-base information	Green Plate
Bulb shape	T5 [16 mm (T5)]
Approval and application	
Energy Efficiency Class	G
Mercury (Hg) content (nom.)	1.2 mg
Energy consumption kWh/1,000 hours	55 kWh
	423565

Product data	
Full product code	871150064391955
Order product name	MASTER TL5 HO 54W/865 SLV/40
EAN/UPC – product	8711500643919
Order code	64391955
Local order code	54865
SAP numerator – quantity per pack	1
Local code description	LAMP. FLUOR. TUB. TL5-54WHO/ 865SL
Numerator – packs per outer box	40
SAP material	927929086555
Net Weight (Piece)	105.800 g
ILCOS code	FDH-54/65/1B-L/P-G5-16/1150



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO 54W/865 SLV/40	17 mm	1149.0 mm	1156.1 mm	1153.7 mm	1163.2 mm



MASTER TL5 HO 54W/865 SLV/40

Photometric data

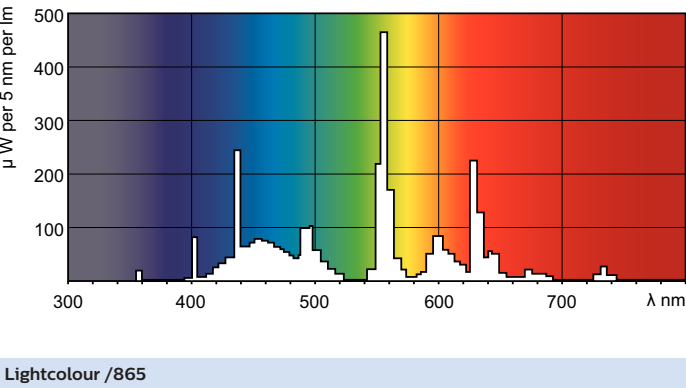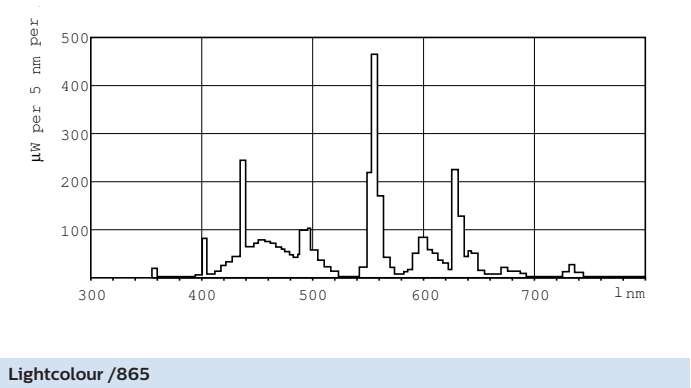


MASTER TL5 High Output

Lifetime

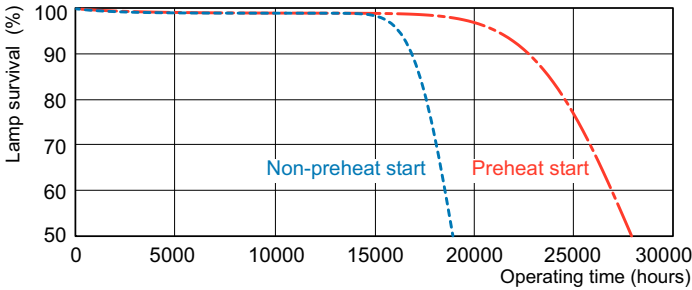

LDLE_TL5-HO8_0001-Life expectancy diagram

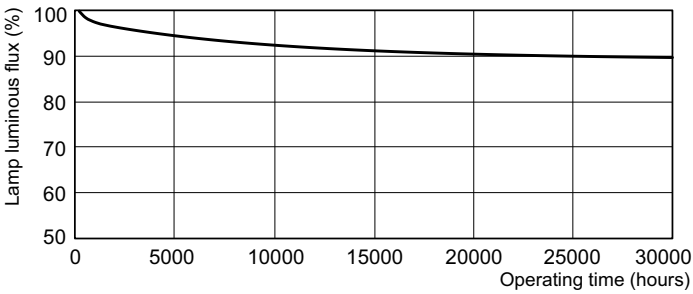

LDLE_TL5-HO8_0002-Life expectancy diagram

LDLM_TL5-HO8_0001-Lumen maintenance diagram

