


# FTP Cat6 Patch cord, grey, 20 m

PP6-20M

- CAT6 AWG26 stranded foil shielded patch cord with moulded strain relief 50u" 8P8C plugs, 20m

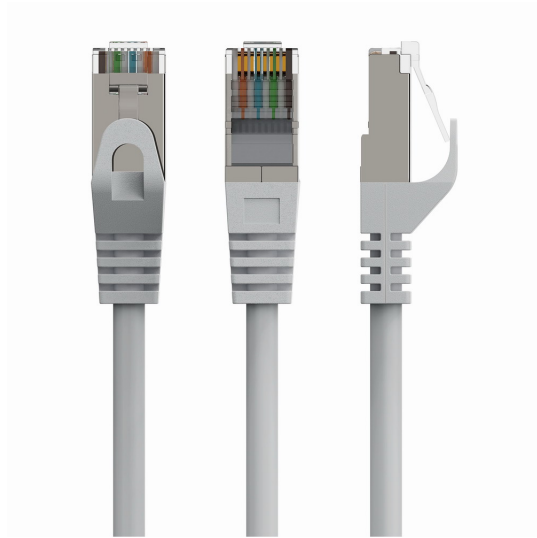

## Specifications

Category: category 6  
Type: FTP (foil shielded)  
Frequency bandwidth: Max. 250 MHz  
Compliance with ANSI / TIA / EIA-568B standards  
Conductor: AWG 26 (7 x 0.15 mm wire), CCA  
Conductor insulation: HDPE 0.86 mm  
Shielding: AL foil  
LDPE filler: yes  
Polyester tape: yes  
Drain wire: yes (7 x 0.12 mm CCA)  
Jacket material: PVC  
Jacket braiding: n/a  
Jacket outer diameter: 6.2 mm  
Length: conform item description  
Color: conform item description

## Packaging

|                                |                |
|--------------------------------|----------------|
| Q'ty in crtn, pcs              | 20             |
| Crtn volume, CUM               | 0.046          |
| Crtn weight, kgs               | 10.2           |
| Individual package size LxWxH: | 145x95x95 mm   |
| Carton size LxWxH:             | 380x390x310 mm |
| Country of origin              | CN             |
| Barcode                        | 8716309045445  |
| Customs code                   | 8544421000     |

## Certificates

