

# JM 8 T KNX

Item no.: 4940255




## KNX

### Actuators DIN rail and gateways

## Description

- 8-way blind actuator FIX2
- For controlling drives for blinds, shutters, sun and vision protection devices, skylights and ventilation flaps
- Manual operation on device (even without bus connection)
- LED Up and Down switching status display for each channel
- Potential-free contacts for Up and Down per channel
- Copy function for fast configuration

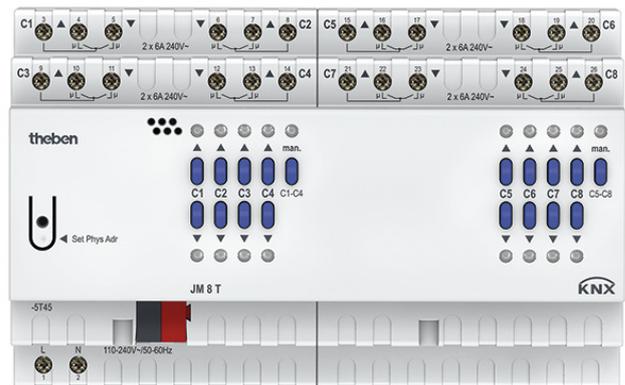


## Technical data

JM 8 T KNX	
Operating voltage KNX	Bus voltage, $\leq 4$ mA
Operating voltage	110 V AC - 240 V AC, 50 Hz - 60 Hz
Stand-by consumption	$\sim 0.5$ W
Frequency	50 - 60 Hz
Number of channels	8
Width	8 modules
Installation type	DIN rail
Type of connection	Terminal screws   Bus connection: KNX bus terminal

JM 8 T KNX	
Max. cable cross section	Solid wire: 0.5 mm <sup>2</sup> ( $\varnothing$ 0.8) to 6 mm <sup>2</sup>   Stranded wire with end sleeve: 0.5 mm <sup>2</sup> to 4 mm <sup>2</sup>
Output	NO contact, 6 A
Switching output	Potential-free, for SELV, if the whole device switches SELV
Ambient temperature	-5°C ... 45°C
Type of protection	IP 20
Protection class	II according to EN 60 669

## Connection example

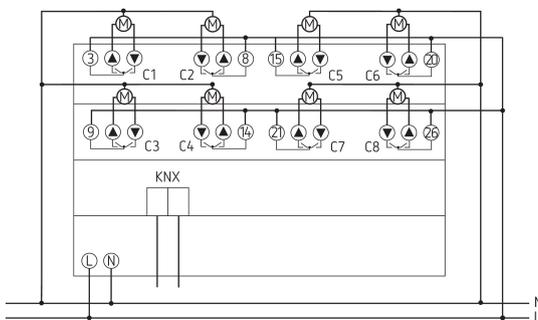

Subject to technical changes and misprints

additional information at: [www.theben.de/product/4940255](http://www.theben.de/product/4940255)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

07/04/2025


Page 1 of 2

# JM 8 T KNX

Item no.: 4940255

**theben**

## Scale drawings

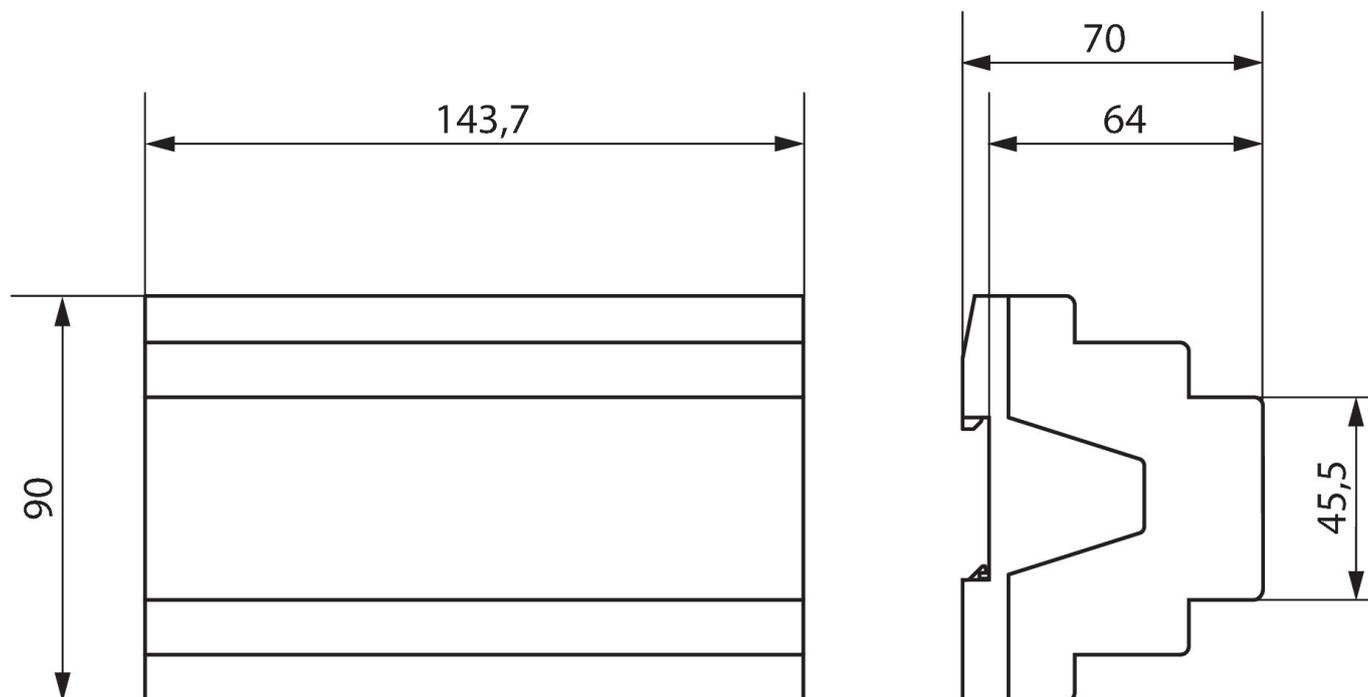

Subject to technical changes and misprints

additional information at: [www.theben.de/product/4940255](http://www.theben.de/product/4940255)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

07/04/2025

Page 2 of 2