
PCE data sheet

article#	**923-6v**
article description	**CEE-wall mounted socket wiring through 32A 3p 6h IP44**
description long	CEE-wall mounted socket wiring through 32A 3p 6h IP44 housing material: PA6 rated current: 32A number of poles: 3 (2P+PE) clock-position: 6h rated voltage/frequency: 200-250V~ / 50+60Hz contacts: brass nickel plated connection technology: screw terminals cable entry: top, 2x bottom, rear inc. threaded cable grommet housing for wiring through IP protection class: IP44
GTIN (EAN)	9003399143427
country of origin	AT
customs number	85366990
net weight	0.338 kg
packaging quantitiy	5



ETIM 7.0	EC001321
Model	Surface mounted (plaster)
IEC-amperage	32 A
Number of poles	3
Voltage acc. EN 60309-2	230 V (50+60 Hz) blue
Clock hour position	6 h
Identification colour	Blue
RAL-number	
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Cable entry	Swivel
Material	Plastic
Contact material	CuZn
Surface finish contacts	Nickel-plated
Type of fastening	Inner lying mounting

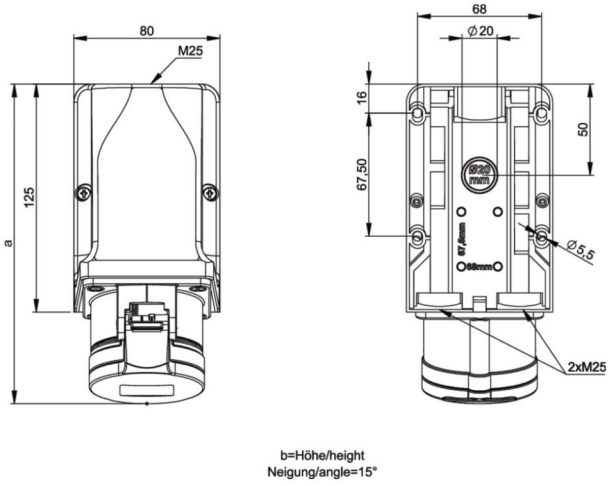

wire flexible	2,5-6 mm²
wire solid	2,5-10 mm²
contact screws	110 Ncm
dismantling length	50 mm
stripping length	12-14 mm

www.manufacturer-safety.info

2/24/2021