

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Lena Lighting S.A.

Supplier's address: Lena Lighting S.A., ul. Kórnicka 52 63-000 Środa Wielkopolska

Model identifier: 059230

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	220-240V 50-60Hz		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No


Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	G
Useful luminous flux (Φ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	400 in Nar-row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 100
On-mode power (P_{on}), expressed in W	6,3	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,377 0,375	
Parameters for directional light sources:				
Peak luminous intensity (cd)	156	Beam angle in degrees, or the range of beam angles that can be set	36	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	3	Survival factor	0,93	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,93	Colour consistency in McAdam ellipses	3	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,3	Stroboscopic effect metric (SVM)	2,5	

(a), - : not applicable;

(b), - : not applicable;

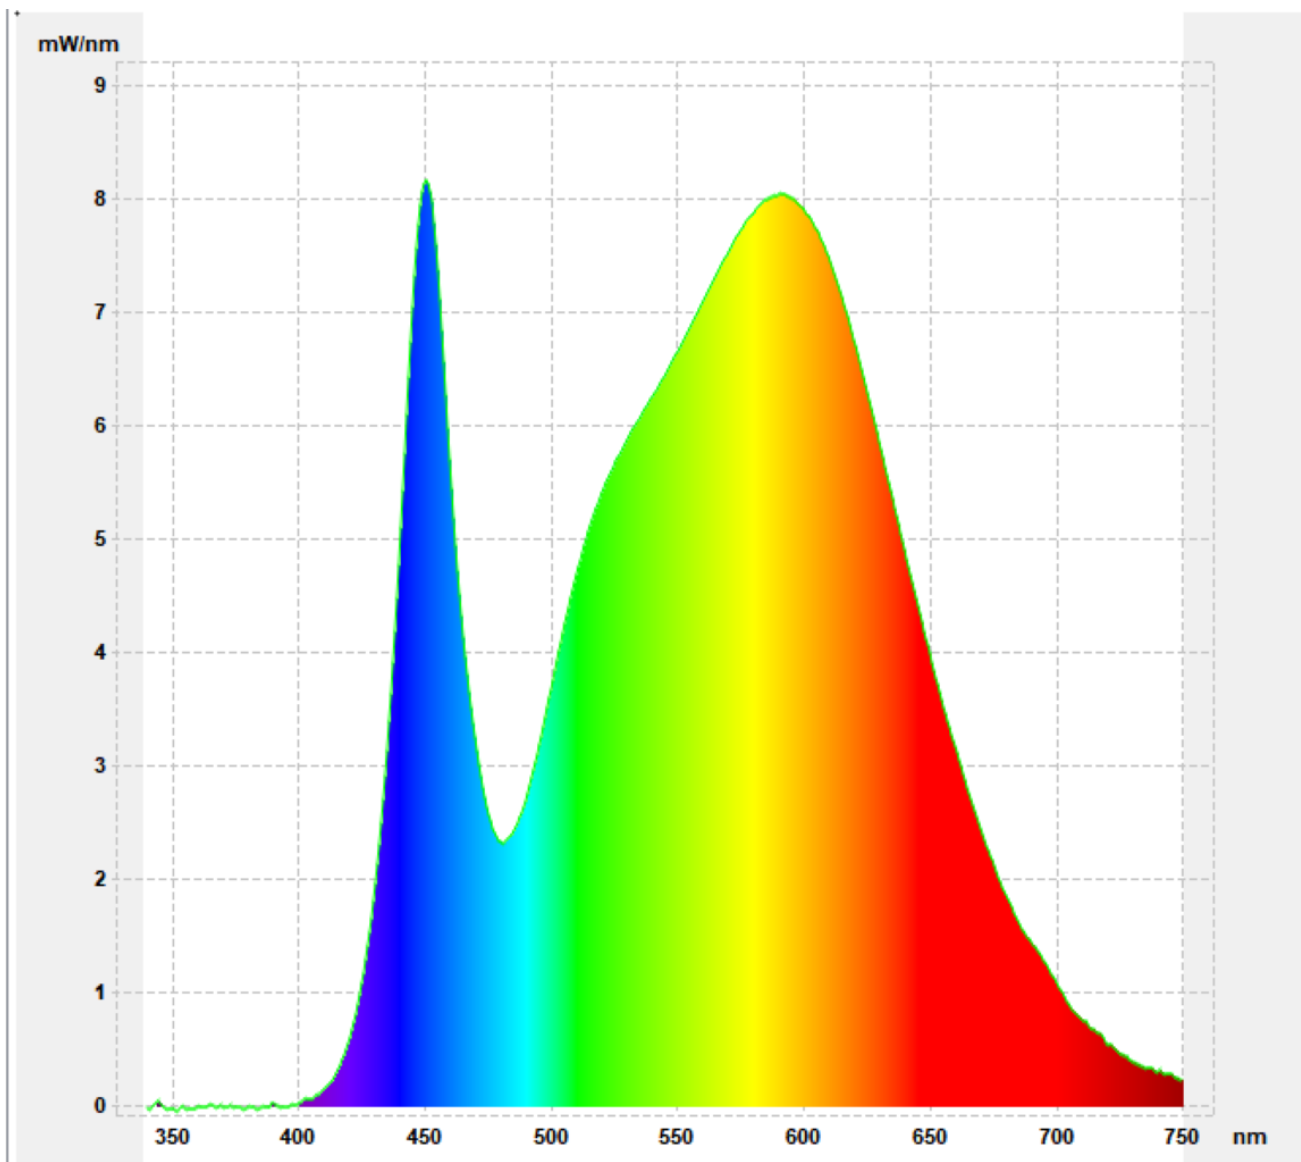

Model placed on the Union market from 01/08/2014



EPREL registration number: 1014660

<https://eprel.ec.europa.eu/qr/1014660>

Supplier: LENA LIGHTING SPÓŁKA AKCYJNA (Manufacturer)

Website: <https://www.lenalighting.pl/>

Customer care service:

Name: Lena Lighting S.A.

Website: <https://www.lenalighting.pl/>

Email: kontakt@lenalighting.pl

Phone: +48612860300

Address:

ul. Kórnicka 52 63-000 Środa Wielkopolska